

CHANNEL DRAIN

CD2



FEATURES

- Continuous Drainage Channel with in-built Fall to Outlet, using 3mm Thick Material
- Anti-Slip Pedestrian Loading "Heelproof" Grate, using 3mm Thick Bars with maximum 6mm Gap
- Variable Outlet Location
- Shallow Depth allows installation in "Topping Slab/ Tile Bed"

OPTIONS




- Variable for Dimension & Shape depending on your application & Client. Please consult our Office
- Extra Heavy Duty Grate
- Security Lock Down Fixings for Grate



DRAINS, SUMPS & GRATES

CHANNEL DRAIN

CD2

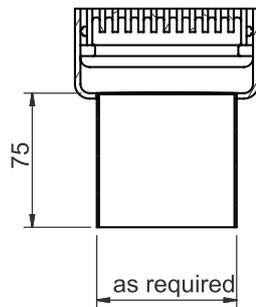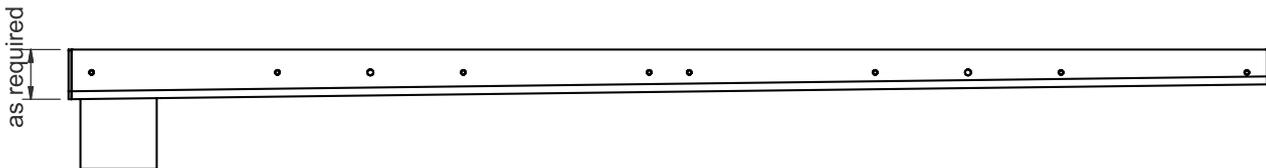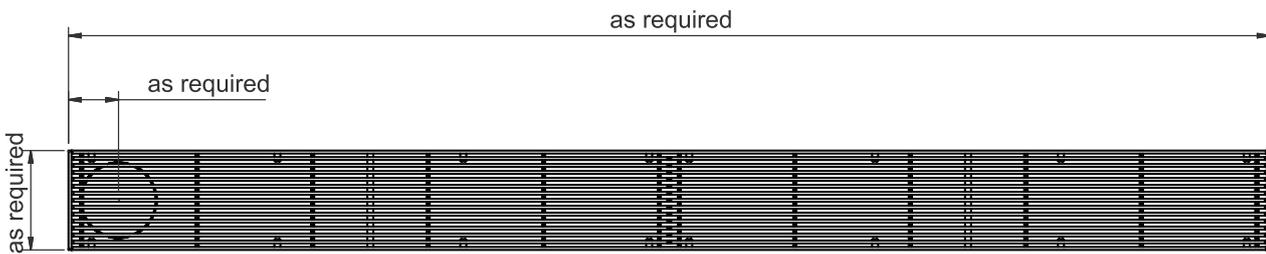

SPECIFICATIONS

Stainless Steel Channel Drain shall be Model CD2
from Opie Manufacturing Group
Phone 02 4735 5666