


## LINT TRAP LT



Model shown is LTAG2  
above ground - with  
two inlet points



Model shown is LTIG2 in  
ground - with two inlet  
points and alternative lids



### FEATURES



- For use in Commercial Laundry
- Removable Filter Baskets
- Removable Filter Screen
- Surge Flow Baffle
- Fixed Tertiary Strainer over Outlet
- Removable Lids for Inspection & Cleaning

### OPTIONS

- Above Ground or In Ground Models Available
- Single, Two or Three Inlets for discharge from Multiple Washing Machines
- In Ground Models available with Slotted Lids for Floor Drainage
- Design Profile is variable to suit your Special Application
- Drawings can be provided to obtain Authority Approval

WASTE TREATMENT, TRAPS & CONNECTIONS

LINT TRAP  
 LT

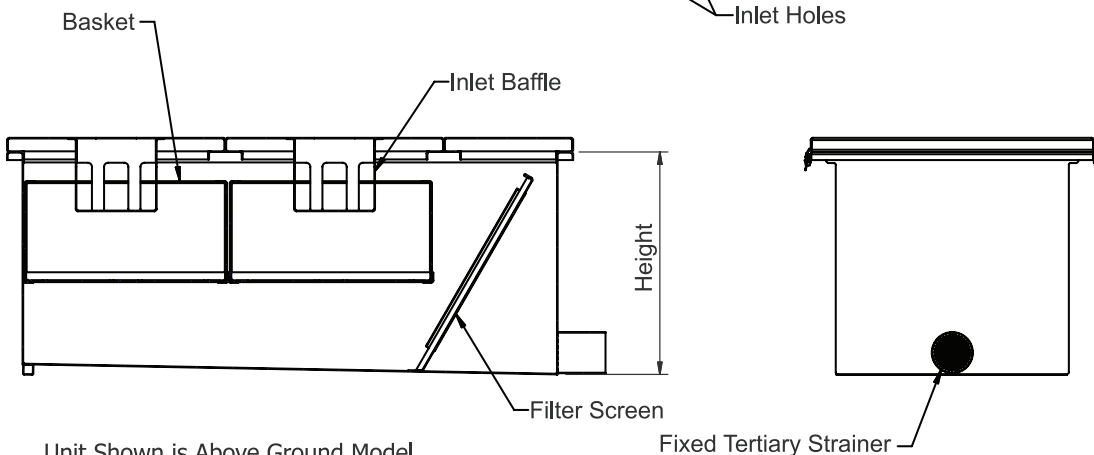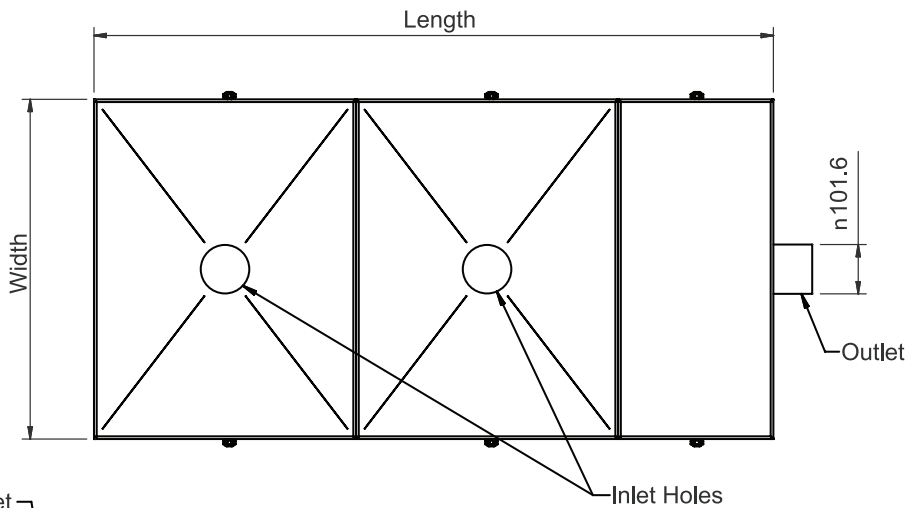

Unit Shown is Above Ground Model  
 LTAG/IG2

Above Ground Model	In Ground Model	Capacity	Length	Width	Height	Inlets
LTAG1	LTIG1	200 Litres	820	700	600	1
LTAG2	LTIG2	350 Litres	1400	700	550	2
LTAG3	LTIG3	480 Litres	1900	700	550	3



**SPECIFICATIONS**

Stainless Steel Lint Filter Trap shall be Model LT from Stainless Metal Craft.  
 Phone 02 4735 5666